


# Fines-Sta™ 100

## Fines Control Agent

FLUIDS AND PERFORMANCE ADDITIVES

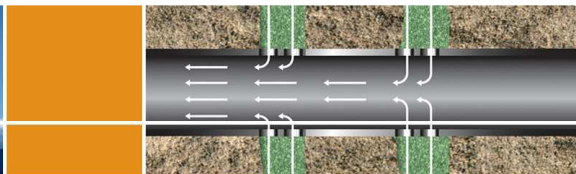

Siliceous fines are generally loosely bound to sandstone formations and easily mobilized into the produced liquids, particularly after stimulation treatments. Their presence may lead to plugging of the pores of the formation (or screens). They may also cause the formation of stable emulsions (fines may act as nucleating centers). The net effect is short and long-term production decline or well abandonment in severe cases.

Our Fines-Sta™ 100 fines control agent is used to address fines migration challenges associated with siliceous rocks. In particular, it is used for fines encountered in crude oil production or generated as a result of hydraulic fracturing or sandstone acidizing. Such treatment can result in a significant increase in the productivity and stabilization of the well, typically for a long period of time (several years in some cases). The Fines-Sta 100 fines control agent can also reduce maintenance costs.

### Key Features and Typical Benefits

- Powerful impact on siliceous fines consolidation
- May be used either during well completion or stimulation
- Reduces excessive mineral dissolution by hydrofluoric acid (HF) when used during acid jobs

### How the Fines-Sta 100 Fines Control Agent is Used

The Fines-Sta 100 fines control agent is used for fines originating from non-clay minerals such as quartz, mica, amorphous silica, and feldspar. It is easily dispersible in water and in various brines.

When used in completion fluids, a recommended starting level is 1% v/v of Fines-Sta 100 fines control agent as received. At this concentration, the material is soluble in 2% KCl, 3% NH<sub>4</sub>Cl or 3% CaCl<sub>2</sub> brines. The level of product will need to be adjusted depending on the severity of the problem and the effect required.

If the product is intended to be used in a conventional frac pack operation without the use of other fines stabilizing agents, normal process is recommended. This typically consists of a mini-frac and step-rate injection test to establish the fracture/formation characteristics.

The fracture is created with fluid devoid of proppant followed by crosslinked fluid containing increasing levels of proppant injected in stages. The Fines-Sta 100 fines control agent should be added to the pad portion of the fluid at a starting level of 0.5% to 1% v/v. This level will have to be adjusted depending on the severity of the problem and the effect required.

Our Fines-Sta 100 fines control agent can also be used in acid jobs. At 1% by weight, it is soluble in 15% HCl, 12% HCl + 3% HF and in 10% HCl + 10% acetic acid. The success or failure of an acid job is highly dependent on the concentration of the acids, particularly HF: small concentration variations may have disproportionately high effects. The potential use of the Fines-Sta 100 fines control agent can help mitigate this issue, thus increasing the chances of success and the reliability of the treatment without the need for extensive laboratory work to establish the optimum levels of acids needed for a particular formation.

It is recommended that our Fines-Sta 100 fines control agent be evaluated at increasing concentrations from 0.5% up to 1% v/v. Alternately, the product may be blended at similar levels in the NH<sub>4</sub>Cl brine overflush following the acid treatment.

Typical Physical Properties		
Property	Unit	Value
Physical Form	-	Clear Liquid
Color	-	Light Yellow
Specific Gravity at 77°F (25°C)	-	1.076
Viscosity at 68°F (20°C)	mm <sup>2</sup> •s <sup>-1</sup>	4.0
Flash Point, Pensky-Martens Closed Cup ASTM D-93	°F (°C)	212 (100)
Solubility	-	See How to Use Section

Typical product values determined on commercial material whose properties might vary within the specification limits. Typical product data values should not be used as specifications. Assistance and specifications are available from Momentive.

## Product Safety, Handling, and Storage

Our Fines-Sta 100 fines control agent is best stored at temperatures between 32° and 95°F (0° and 35°C) to facilitate ease of handling, but storage at lower or higher temperatures will not affect its subsequent performance.

Customers should review the latest Material Safety Data Sheet (MSDS) and label for product safety information, safe handling instructions, personal protective equipment if necessary, and any special storage conditions required for safety. MSDS documents are available upon request from your Momentive representative. For product storage and handling procedures to maintain the product quality within our stated specifications, please review Certificates of Analysis, which are available in the Order Center. Use of other materials in conjunction with Momentive products (primers, for example) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

## Limitations

Customers must evaluate Momentive products and make their own determination as to the fitness of use in their particular applications.



### **Momentive Specialty Chemicals Inc.**

Oilfield Technology Group  
15366 Park Row  
Houston, TX 77084 USA  
+1 281 646 2800  
[momentive.com/oilfield](http://momentive.com/oilfield)

For more information visit [momentive.com/oilfield](http://momentive.com/oilfield) or [fracline.com](http://fracline.com).

®, ™ and SM denote trademarks owned or licensed to Momentive Specialty Chemicals Inc.

© 2012 Momentive Specialty Chemicals Inc. 10/26/12

The information provided herein was believed by Momentive Specialty Chemicals ("Momentive") to be accurate at the time of preparation or prepared from sources believed to be reliable, but it is the responsibility of the user to investigate and understand other pertinent sources of information, to comply with all laws and procedures applicable to the safe handling and use of the products and to determine the suitability of the product for its intended use. All products supplied by Momentive are subject to Momentive's terms and conditions of sale. MOMENTIVE MAKES NO WARRANTY, EXPRESS OR IMPLIED, CONCERNING THE PRODUCT OR THE MERCHANTABILITY OR FITNESS THEREOF FOR ANY PURPOSE OR CONCERNING THE ACCURACY OF ANY INFORMATION PROVIDED BY MOMENTIVE, except that the product shall conform to Momentive's specifications. Nothing contained herein constitutes an offer for sale of any product.